



GST NO: 07CDEPK4437L1ZB

PAN NO: CDEPK4437L

# WANTED PACKAGING MACHINES

**RZ-575 Old No. RZ-112 Khasra No. 73 East Sagar Pur Street-  
No-10, South West New Delhi 110046 (Near Sai Baba Temple)**

---

**Mfrs. of : Truck Loading Conveyor,  
Inclined Conveyor, Inject Conveyor, Belt  
Conveyor, Chain Conveyor, Slat  
Conveyor**

**Deals in All Type of Packaging  
Machines Application, Sales  
Services, Spare Parts and  
Packaging Material**



**Share & Follow Us**

# Semi Automatic Box Strapping Machine



Model	WPM207.1.5
Cycle Time	1.5 Sec/ Strap
Tension Range	15-45 Kgs
Strap Width	6,9,12,15.5 Adjustable
Sealing Method	Heating Element
Reel Inside Diameter	200mm
Power Supply	220/50/1PH
Table Height	780mm
Power Consumption	0.5
Layout Dimension	L902xD575xH780 mm
Weight/Body Thick	115 kgs/2mm(Body)



Model	WPM207.2.0
Cycle Time	1.5 Sec/ Strap
Tension Range	15-45 Kgs
Strap Width	6,9,12,15.5 Adjustable
Sealing Method	Heating Element
Reel Inside Diameter	200mm
Power Supply	220/50/1PH
Table Height	780mm
Power Consumption	0.5
Layout Dimension	L902xW575xH780 mm
Weight/Body Thick	115 kgs/1.5mm(Body)



Model	WPM207.3.0
Cycle Time	1.5 Sec/ Strap
Tension Range	15-45 Kgs
Strap Width	6,9,12,15.5 Adjustable
Sealing Method	Heating Element
Reel Inside Diameter	200mm
Power Supply	220/50/1PH
Table Height	780mm
Power Consumption	0.5
Layout Dimension	L902xD575xH780 mm
Weight/Body Thick	115 kgs

# Semi Automatic Strapping Machine Low Table



<b>Strap Width</b>	6 mm - 15.5 mm
<b>Tension Range</b>	15 - 45 kg
<b>Weight</b>	80 kg
<b>Electrical Requirements</b>	110V, 220V, 230V, 240V 50/60Hz 1PH

# Battery Powered Strapping Tool /Pneumatic Strapping Tools

## Battery Powered Strapping Tool

<b>Strap Width</b>	<b>13-16 mm adj</b>
<b>Strap Thickness</b>	<b>0.5-1.0 mm</b>
<b>Tension</b>	<b>40-200kg</b>
<b>Type of Seal</b>	<b>Friction Weld</b>
<b>Battery Charge</b>	<b>up to 200 Cycles With One Charge</b>
<b>Dimensions</b>	<b>375x130x140 (LxWxH)</b>
<b>Net Weight</b>	<b>3.9 kg</b>



Model	Strap Material
AQD-19	PP/PET
Width	AQD-19
13-19mm	Fiction Walding
Thickness	Air Pressure



## Automatic Strapping Machine



Model	WPM.TP-6000
Max. Strap Size (mm)	850x600
Min. Strap Size (mm)	80x50
Strapping Speed (seconds)	2
Strap Width (mm)	9 15
Strap Force (newton)	25 - 700
Working Table Height (mm)	830
Power Source (v/hz)	440 / 50, 0.1.2HP
External Dimension (mm)	1420x650x1565
Machine Weight (kg)	235

## Combo- Automatic Tapping and Strapping Machine



Model	CX2EX
1Phase	110V/220V/240V
MAX: 50mm(2)	L x W500 x H500 mm
Adjustable	20 Cartons Per Minute
Carton : L500 mm	



# Upper and Lower Side Drive Tape Sealing Machine



<b>Model</b>	<b>FXJ-6050I</b>
<b>Sealing Capacity</b>	About 1,000 Standard Cases Per Hour
<b>Adhesive Tape Used</b>	Bopp, PVC adhesive tape
<b>Width Of Adhesive Tape</b>	36/48/60/72mm
<b>Power Sources</b>	200V, 50HZ 180W
<b>Max. Sealing Size</b>	W500xH600mm
<b>Min. Sealing Size</b>	W140xH150mm

# Continuous Band Sealers Machine



Model	FRB-770
Voltage	AC220V/50Hz 110V/60Hz
Transmission Power	60W
Sealing Electric Power	2x300W
Sealing Speed	0-21 m/min
Sealing Width	6-12mm
Temperature Range	0-300°C
Sealing Center To Conveyor Station	10-40 mm
Single Film Max Thickness	<0.4 mm
Single Maximum Load Weight	<1 k g
Total Maximum Load Weight	<3 k g
Dimensions	L840xW380xH270mm
Machine Weight (kg)	21





Model	FRB-770II
Voltage	AC220V/50Hz 110V/60Hz
Transmission Power	60W
Sealing Electric Power	2x300W
Sealing Speed	1-21 (1-30)m/min
Sealing Width	6-12mm
Temperature Range	0-300
Sealing Center To Conveyor Station	120-280mm
Single Film Max Thickness	<0.4 mm
Conveyor Size	830x150mm
Total Maximum Load Weight	<3 k g
Dimensions	L840xW380xH560mm
Machine Weight (kg)	26



Model	FRB-770II
Voltage	110/220V/50-60Hz
Transmission Power	120W
Sealing Electric Power	1.235W
Sealing Speed	0-12m/min
Sealing Width	6-12mm
Temperature Range	0-300
Single Film Max Thickness	<0.8 mm
Total Maximum Load Weight	<15 k g
Dimensions	L1243xW580xH1228mm
Machine Weight (kg)	80





# Vaccum Packaging Machine



## DZ500/2D

### Stainless- Steel Vacuum Chamber

Chamber Size	520x520x75mm
Single Sealing- Bar	500x10mmx2(DZ(Q)500/A)
Single Sealing- Bar	500x10mmx1(DZ(Q)500/B)
Capacity	20m <sup>3</sup> /h
Cycle Time	10-25sec
Voltage	220V/50HZ
Power	0.9KW
Machine Size	650x570x960mm
Machine Weight (kg)	84




## DZ600/2D

### Stainless- Steel Vacuum Chamber

Chamber Size	620x620x75mm
Single Sealing- Bar	600x10mmx2(DZ(Q)600/A)
Single Sealing- Bar	600x10mmx1(DZ(Q)600/B)
Capacity	20m <sup>3</sup> /h
Cycle Time	10-25sec
Voltage	220V/50HZ
Power	0.9KW
Machine Size	750x670x980mm
Machine Weight (kg)	110



# Vaccum Packaging Machine



## DZ 260

### Stainless-steel Vacuum Chamber

Chamber Size	390x280x50 mm
Single Sealing- Bar	260x8 mmx1
Capacity	10m <sup>3</sup> /h
Cycle Time	10-20sec
Voltage	220V/50HZ
Power	0.4KW
Machine Size	540x340x360mm
Machine Weight (kg)	31



## DZ400/2D

### Stainless- Steel Vacuum Chamber

Chamber Size	440x420x75mm
Single Sealing- Bar	400x10mmx2(DZ(Q)400/A)
Single Sealing- Bar	400x10mmx1(DZ(Q)400/B)
Capacity	20m <sup>3</sup> /h
Cycle Time	10-25sec
Voltage	220V/50HZ
Power	0.9KW
Machine Size	540x490x960mm
Machine Weight (kg)	67

# Manual L-Sealer Machine



Model - WPM15/20	5045M (Manual)	5045S (Semi Auto)
Voltage (V/Hz)	AC 220/50	AC 220/50
Power (kw)	1.0	1.2
Packaging Dimension (pcs./h)	300-500	800-1200
Max Packaging Dimension (LxWxH)(mm)	450x400x250	450x400x300
Max Sealing Dimension (LxWxH)(mm)	500x450	500x450
Dimension (LxWxH)(mm)	1560x700x1100	1560x757x1040
Body	Powder coated (M.S. Type)	Powder coated (M.S. Type)
Machine Weight (kg)	80	110

# Shrink Chamber Machine



Model	WPM 15/20
Max Packing Dimension	450x300x250
Running Load	(1.9kw/hr)
Power Consumption	3.5kw
Power Supply	AC 220V/50HZ
Dimensions	1895x720x1080mm
Net Weight(kg)	110kg

# Shrink Tunnels Machine



Model	Voltage
2012	220V
4525	220v/380v
4535L	380V-3PH
6535L	380V-3PH
5540M-PE	380V3PH

Power	Conveyr Load
2.4kw	0-6
6.5kw	15kg
9.6kw	30kg
9.6kw	30kg
2kw	40kg

Heating Chamber Size mm	Speed
200 x 120	0-6
900 x 450x (50-250)	0-10
1200 x 450 x (50-350)	0-10
1200 x 650 x (50-350)	0-10
1400 x 550 x 400	0-10

Net	Dimensions
30	700 x 400 x 500
75	1200 x 610 x 1240
120	1600 x 610 x 1340
150	1600 x 850 x 1200
280	2470 x 710 x 1450

# Automatic Sealing Cutting Shrink Packaging Machine



Model	BS4522N	BS5530LN
Power Supply	380V 50/60HZ	380V 50/60HZ
Power	12KW	16KW
Size Of Shrink Oven	1200x450x220mm	1600x550x300mm
Conveying Speed	0-10m/min(Adjustable)	0-10m/min(Adjustable)
Conveying Weight	30kg	30kg
Material	PVC POF PP	PVC POF PP
Dimensions	1600x700x1370mm	2000x800x1450mm
Machine Weight (kg)	160	200

Model	FQL-450A	FQL-550A
Power Supply	220V 50/60HZ	220V 50/60HZ
Power	1.35KW	1.35KW
Highest Packaging	140mm	140mm
Seal Tangent Size	560x440mm	660x540mm
Production Capacity	15-30bags/min	15-30bags/min
Air Pressure	0.5Mpa	0.5Mpa
Dimensions	1650x920x1450mm	1860x1020x1550mm
Machine Weight (kg)	300	350

# Web Sealer Machine



## TF-65540SA

Voltage(V/Hz)	AC 220/50 110/60
Air Pressure Required(kg/cm <sup>3</sup> )	5-7
Power (kw)	1.5
Max Packing Size(LxWxH)(mm)	550x400x380
Max. Sealing Length (mm)	650
External Dimension (LxWxH)(mm)	925x1040x1920
Net Weight (kg)	300

# Carton Box Stretch Wrapping Machine



<b>Model</b>	WPM-T1100 PLT
Control	Omron PLC 0-3 top(bottom) & up-down Wrap times choose Cycle Pause capability
Film carriage drive	Film carriage can up-down to suit difference height product; Heavy duty chain lift, calm and safety
Film Carriage	Power prestretch 200% Film Delivery variable speed by seprate DC Drive Motor Film dancer-bar with variable speed output
Height Sensing	Adjustable limit block to active top limiting switch
Rotating Platform Speed	3-20RPM adjustable by frequency charger
Top Plate	Pneumatic top plate
Max. Load Size	300-600(L) x 300-600mm (W) x 300-600mm (H) Special packing height available
Max. Weight Capacity	100 Kg
Power Supply	220V/50HZ/1Phase 1.0Kw
Machine Weight	220 kG
Machine Dimension	1740mm x 600mm x 1800mm






# Induction Sealer Machine



Model	S700A	S700C
	(Manual Model)	(Manual Model)
Voltage(V/Hz)	AC 220/50	AC 220/50
Power (W)	500	500
Heal Diameter (mm)	20-100	60-130
Delivering Speed	N/A	N/A
Vessel height	Absoluteness	Absoluteness
Dimension (LxWxH) (mm)	340x290x150	340x290x150
Capacity	0-100 pc. / min	0-100 pc. / min
Machine Weight (kg)	5	5



# Continuous Induction Sealer Machine

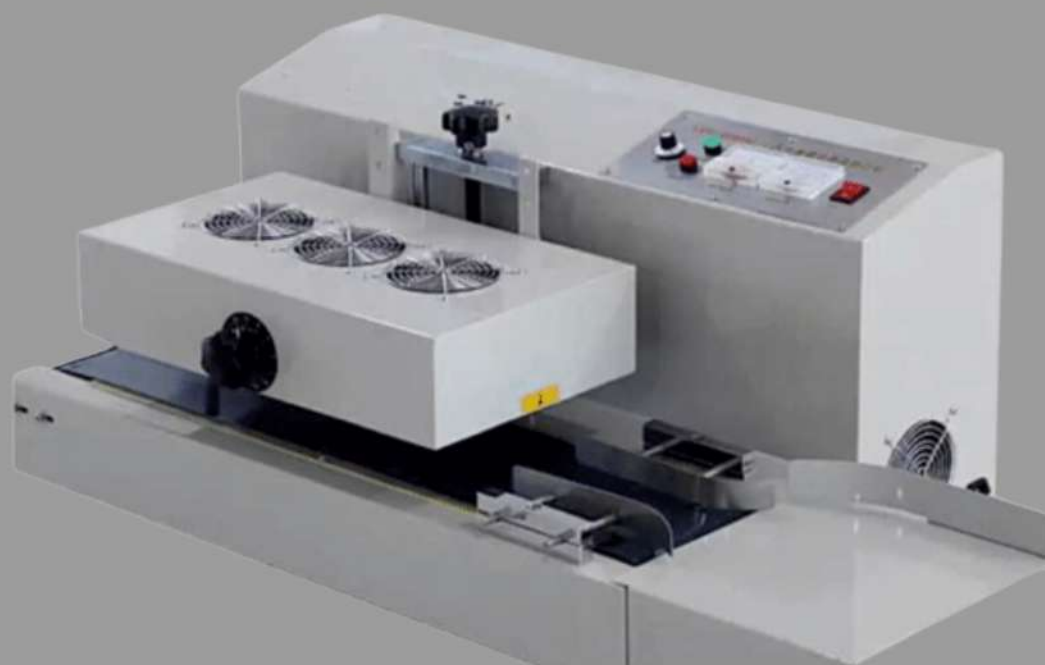

Model	S 2000
Voltage(V/Hz)	AC 220/50
Power (W)	2000
Heal Diameter (mm)	20-130
Delivering Speed	2-12 m/min
Vessel Height	40-400mm
Dimension (LxWxH) (mm)	1150x480x400
Machine weight (kg)	38

# Printing Batch Coding Machine

## Printing Batch Machine

**DY-8 Date Printing Machine  
Hot Code Stamp Printer  
Coding Machine Direct  
Thermal Label Printer Date  
Ribbon Coder 220V 60W**



## MY 380

Model	MY 380
Voltage (V/Hz)	220/50 Ac220/50Hz
Power (w)	180
Printing Position	60x250(W/L)
Printing Speed (Pcs/min)	100
Object Size (mm)	L-50-500 W:30 ~ 300
Printing Type	Solid Ink coding
Dimension (LxWxH)(mm)	440x465x300
Machine Weight (kg)	26





**Truck Loading Conveyor, Inclined Conveyor, Inject Conveyor, Belt Conveyor, Chain Conveyor, Slat Conveyor**

**Note: We make conveyors according to order**

**Customized Conveyors**